


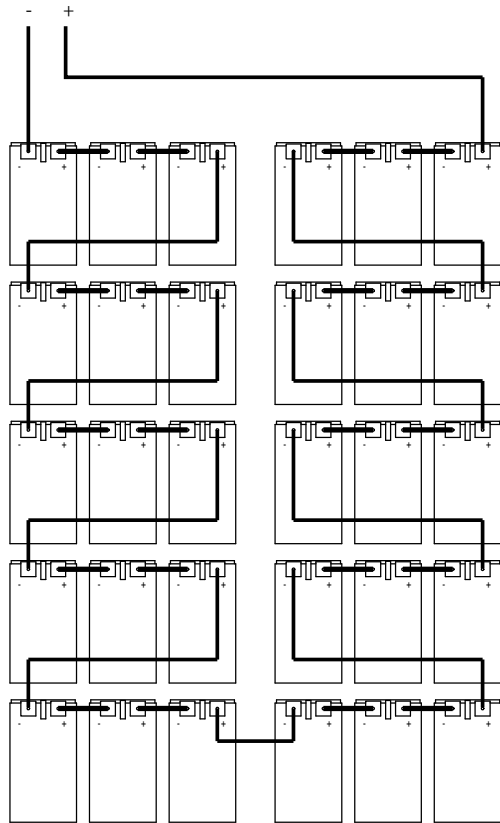
RACK NOTES:

1. EMPTY RACK WEIGHT: 724 LBS, TOTAL WEIGHT (2 RACKS) ONE 480V STRING.
2. FULLY WELDED FRAME. MANUFACTURED FROM HEAVY GAUGE STEEL.
3. ALL BATTERY TERMINALS HAVE POLYCARBONATE COVERS.
4. OPTIONAL WALL MOUNTED BREAKER ENCLOSURES AVAILABLE.
5. POWDER COATED WITH A CORROSION RESISTANT, EPOXY HYBRID POWDER USING A FIVE STAGE EMERSION PRETREATMENT PROCESS.
6. BATTERIES CAN BE ACCESSED FROM FRONT, REAR, AND BOTH SIDES.
7. CUSTOM DESIGNED PALLETS FOR SHIPPING ANYWHERE, LOCALLY AND GLOBALLY (UPON REQUEST).
8. BATTERY RACK CAN BE MOVED WITH A NORMAL PALLET JACK FROM FRONT AND REAR.
9. STANDARD AND CUSTOM SPILL CONTAINMENT OPTIONS ARE AVAILABLE.


PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ELECTRONIC SYSTEMS SUPPORT. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ELECTRONIC SYSTEMS SUPPORT IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES		 Electronic Systems Support www.ess.to		3233 W. Kingsley Rd. Garland, Texas 75041 PH. 972-272-2468 FAX 972-276-9844	
TITLE: BATTERY RACK, 16V FT, 480V					
PROJECTION: 	DRAWN BY: RNA	NAME: RNA	DATE: 3-5-13	SIZE: D	REV: B
SCALE: 1:16				SHEET 1 OF 3	


TO BREAKER OR FUSE PANEL



BREAKER DETAIL

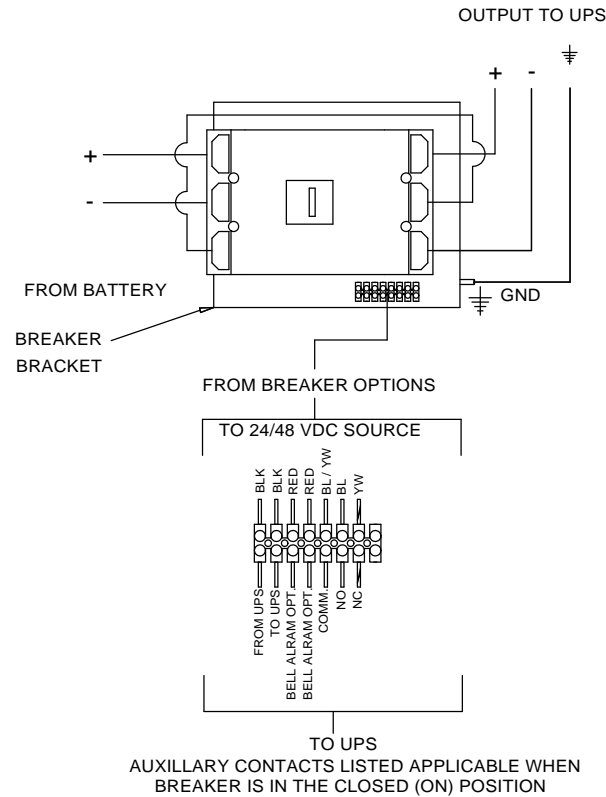

FUSE OPTION

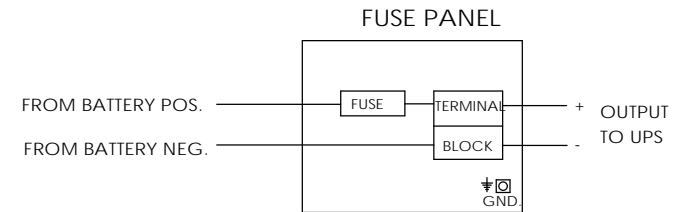



BATTERY CONFIGURATION TABLE		
	BATTERY MANUFACTURER	MAXIMUM NUMBER OF BATTERIES PER CABINET
	ENERSYS	
BATTERY MODEL NUMBER	16HX800F-FR	30
	16HX925F-FR	

ELECTRICAL NOTES:

1. ALL CABLES ARE UL LISTED.
2. ALL BREAKERS ARE UL RECOGNIZED.
3. ALL FUSES ARE UL RECOGNIZED, TYPE A50P, A70P OR EQUIVALENT. ALWAYS REPLACE WITH SAME TYPE OR ITS EQUIVALENT.
4. TERMINAL BLOCKS ARE UL RECOGNIZED, 600V RATED.
5. RACKS ARE SHIPPED WITH THE BREAKER IN THE TRIPPED POSITION.
6. RACK GROUND CONNECTION IS A 5/16-18 THREADED STUD.
7. CABLES BETWEEN BATTERY RACK TO UNINTERRUPTIBLE POWER SUPPLY ARE OPTIONAL.

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ELECTRONIC SYSTEMS SUPPORT. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ELECTRONIC SYSTEMS SUPPORT IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES		 3233 W. Kingsley Rd. Garland, Texas 75041 PH. 972-272-2468 FAX 972-276-9844	
PROJECT: 		TITLE: BATTERY RACK, 16V FT, 480V	
DRAWN BY: RNA	DATE: 3-5-13	DWG. NO.: EFR5A-SPEC	REV: B
SCALE: 1:16		SHEET 2 OF 3	

ESS FRONT TERMINAL RACK SYSTEM MATRIX											
ESS EFR5A RACK SYSTEM PART NUMBERS											
E F R 5 A A A 30 HX925 B 04 A											
DIGIT 1	DIGIT 2	DIGIT 3	CABINET MODEL		DIGIT 6	DIGIT 7	DIGIT 8-9	DIGIT 10-14	DIGIT 15	DIGIT 16-17	DIGIT 18
	TYPE OF BATTERY	TYPE OF CABINET OR RACK	NUMBER OF TIERS	BATTERY TYPE	COLOR	HEIGHT (INCHES)	BATTERY QUANTITY	BATTERY MODEL PER MANUFACTURER	BREAKER OR FUSE	AMPS	BREAKER OPTION
E = ESS STANDARD	F = FRONT TERMINAL	R = RACK	5 = 5 TIER OF BATTERIES	A = 16V FT 928/800	**A = BLACK	**A = 84	30	ENERSYS	B = BREAKER	01 = 1000 AMPS	A = 24 VDC SHUNT TRIP, AUX CONTACT
C = CENTER TAP CABLING					B = BEIGE		27	HX925 - 16HX925F-FR		02 = 800 AMPS	B = 48 VDC SHUNT TRIP, AUX CONTACT
S = SPLIT BUS CABLING					C = LIEBERT GRAY		24	HX800 - 16HX800F-FR		03 = 700 AMPS	C = 24 VDC UVR, AUX CONTACT
					D = MITSUBISHI BEIGE		18			04 = 600 AMPS	D = 48 VDC UVR, AUX CONTACT
					E = MGE WHITE					05 = 500 AMPS	E = 120 VDC SHUNT TRIP, AUX CONTACT
					F = TOSHIBA BLACK					06 = 450 AMPS	F = 240 VDC SHUNT TRIP, AUX CONTACT
					G = GE WHITE					07 = 400 AMPS	G = 120 VDC UVR, AUX CONTACT
					H = LIEBERT BLACK					08 = 350 AMPS	H = 240 VDC UVR, AUX CONTACT
					I = EATON BLACK					09 = 300 AMPS	J = 24VDC UVR W/BELL ALARM
					J - LIGHT GRAY					10 = 250 AMPS	K = BELL ALARM
										11 = 225 AMPS	
										12 = 200 AMPS	
										13 = 175 AMPS	
										14 = 150 AMPS	
										15 = 125 AMPS	
										16 = 100 AMPS	
										17 = 75 AMPS	
										18 = 50 AMPS	
										19 = 40 AMPS	
										20 = 30 AMPS	
<p style="text-align: center;">▶ **REPRESENTS STANDARD COLOR FOR ALL ESS RACKS (DIGIT 6)</p> <p style="text-align: center;">▶ **REPRESENTS ESS STANDARD HEIGHT OF TOP TERMINAL BATTERY RACKS (DIGIT 7) ONLY HEIGHT AVAILABLE FOR THIS RACK</p>											

PART NUMBER GUIDE:

1. REFERENCE THE BATTERY PART NUMBER GUIDE TABLE WHEN ORDERING A RACK.
 2. WHEN PLACING ORDER, INDICATE THE QTY OF RACKS. NO DASHES ARE TO BE INCLUDED IN PART NUMBER. OVERALL PART NUMBER OF SYTEM IS ALWAYS 18 DIGITS LONG.
 3. THE BASE NUMBER (DIGITS 1-5) WILL ALWAYS BE THE SAME.
 4. DIGITS 6-7 WILL FOLLOW THE BASE NUMBER INDICATING THE COLOR AND HEIGHT OF THE RACK.
 5. DIGITS 8-18 MAKE UP THE REST OF THE SYSTEM PART NUMBER WHICH INCLUDE OPTIONS FOR BATTERY QUANTITIES, BATTERY MODEL, AND BREAKER OPTIONS.
 6. EXAMPLE: **EFR5AAA** - THIS REPRESENTS A STANDARD **EFR5A** RACK, WITH A POWDER COAT FINISH OF STANDARD BLACK AND 48.00" HEIGHT.
- ▶ PLEASE NOTE, ONLY STANDARD RACKS (COLOR AND HEIGHT) ARE IN STOCK. MINIMUM ORDERS OF 20 OR MORE RACKS ARE REQUIRED FOR NON STANDARD RACKS UNLESS IT IS THROUGH OEM CONTRACTS.

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ELECTRONIC SYSTEMS SUPPORT. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ELECTRONIC SYSTEMS SUPPORT IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES		 www.ess.to		3233 W. Kingsley Rd. Garland, Texas 75041 PH. 972-272-2468 FAX 972-276-9844	
TITLE: BATTERY RACK, 16V FT, 480V					
PROJECTION: 	NAME: RNA	DATE: 3-5-13	SIZE: D	DWG. NO. EFR5A-SPEC	REV B
SCALE: 1:12				SHEET 3 OF 3	