








TO BREAKER OR FUSE PANEL

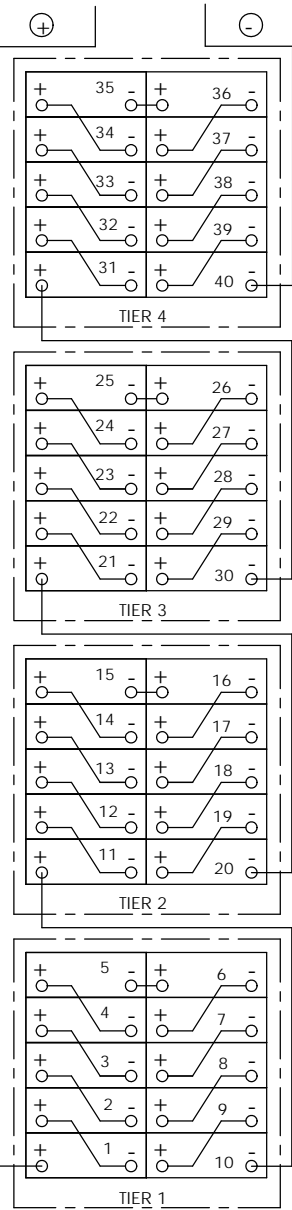


TO BREAKER OR FUSE PANEL

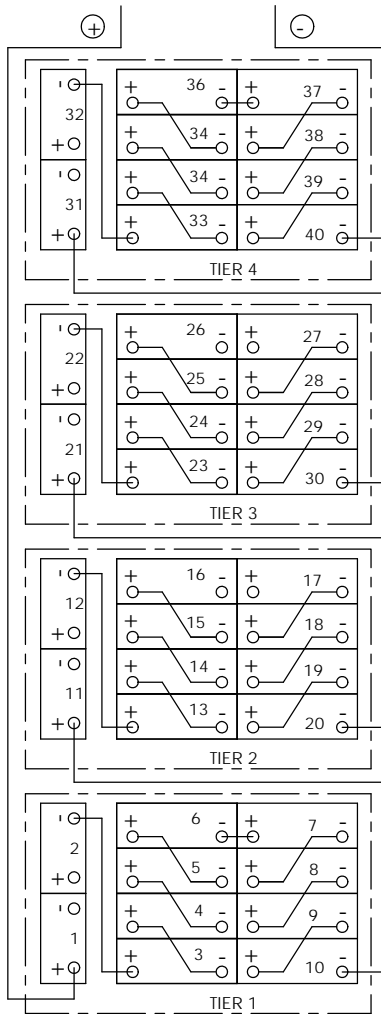

TO BREAKER OR FUSE PANEL

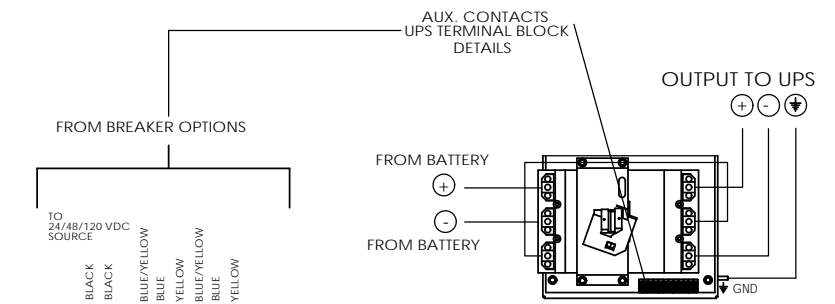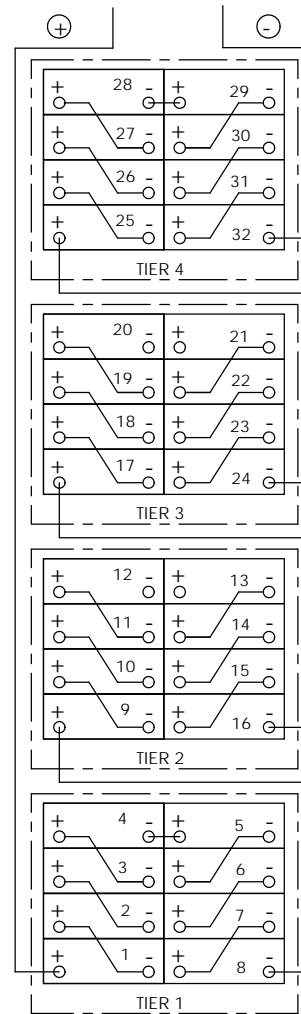

OPTIONAL FUSED CABINET SYSTEM

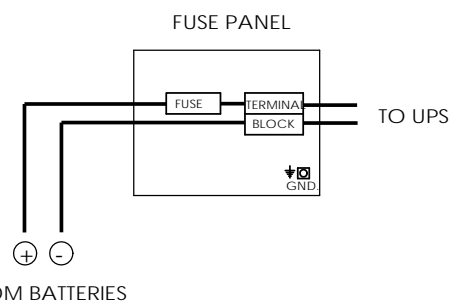

BATTERY CONFIGURATIONS	
WPC CAPACITY	MAXIMUM NUMBER OF BATTERIES
200 W	60
300 W	40
350 W	40
400 W	40
500 W	32
540 W	32
620 W	32

PROPRIETARY AND CONFIDENTIAL  
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ELECTRONIC SYSTEMS SUPPORT. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ELECTRONIC SYSTEMS SUPPORT IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		<b>ELECTRONIC SYSTEMS SUPPORT</b> 888-475-9292 www.ess.to		110 AUSTIN STREET GARLAND, TX 75040 PH. 972-272-2468 FAX 972-276-9844	
DIMENSIONS ARE IN INCHES TOLERANCES:		DRAWN	NAME	DATE	TITLE
ANGULAR: MACH ± .5 BEND #1		CHECKED		5-19-10	BATTERY CABINET
TWO PLACE DECIMAL ± .01		ENG APPR			
THREE PLACE DECIMAL ± .005		MFG APPR			
PROJECTION:		G.A.			
MATERIAL: -		SCALE: 1:1 WEIGHT: SHEET 2 OF 2			
FINISH: -		SIZE DWG. NO. REV			
DO NOT SCALE DRAWING		C C32S A			