


ETC32

12V Top Terminal Battery Cabinet

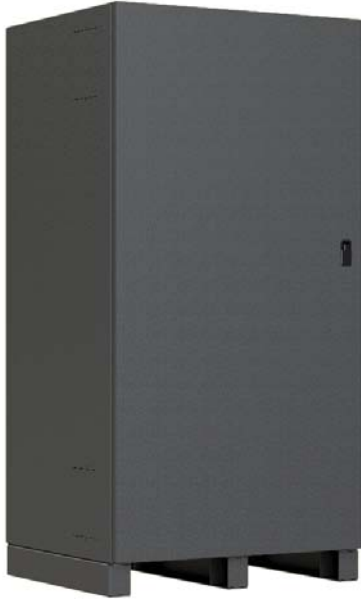

Features:

- Ships fully assembled and wired for easy installation.
- UL 1778 listed and fully tested at the factory prior to shipping.
- Removable hinged doors for easy battery access.
- Locking doors provide access security.
- Batteries secured with non-conductive strapping for safe transit.
- DC Circuit Breakers up to 600A available. Breaker options include: Shunt trips, auxiliary contacts and under voltage releases.
- Acid resistant powder coat finish using a five stage immersion pretreatment process.
- Front and rear access for standard pallet jack.
- NFPA 70 models- available.
- Fully welded frame construction made of heavy gauge steel.
- Seismically certified to IBC (2012), ASCE 7-10, and CBC (2010) codes. Design meets default Seismic Category Design D ($S_s=2.9$), Importance Factor 1.5, and horizontal static acceleration of .817g

Options:

- Additional Booster chargers available for longer run times.
- Spill containment systems options are available.
- Remote Battery Monitoring options are available.
- Custom colors are available to match existing equipment

STANDARD CABINET SPECIFICATIONS

WIDTH		DEPTH		HEIGHT		WEIGHT	
in.	mm	in.	mm	in.	mm	lbs.	Kg
36	915	29.5	749	70.9	1800	555	251

BATTERY CONFIGURATION TABLE

BATTERY MODEL NUMBER	BATTERY MANUFACTURER						MAXIMUM NUMBER OF BATTERIES PER CABINET
	ENERSYS	C & D	EAST PENN	GNB	NORTHSTAR	CSB	
12HX205	UPS12-210MR	45HR2000	S12V120	NSB12-310	HRL12200W	60	
			S12V170				
12XH300	UPS12-300MR	HR3000	S12V285	NSB12-425	HRL12280W	40	
			S12V300				
12HX330	UPS12-350MR	HR3500	S12V370	NSB12-540	HRL12330W	32	
12HX400	UPS12-400MR	HR4000			HRL12390W		
12HX505	UPS12-490MR	31HR5000	S12V500	NSB12-540	HRL12500W	32	
12HX540	UPS12-540MR	HR5500			S12V550NGF		HRL12540W
	UPS12-600MR						
6HX800	UPS6-620MR		6S740NGF			40	